



**Lightweight,  
durable and  
portable**

GENIE AERIAL WORK PLATFORMS



# Customers First Always

## Partnering for Success

Our dedication to lifting you higher extends well beyond the physical reach of our products. We thrive on building satisfying customer relationships because you, our customer, are at the center of everything we do.

Since 1966, we've been developing products to solve your worksite challenges — and that process never ends. Our team of product managers and engineers uses your input to design new products, featuring the latest technology to meet your changing needs. Then we manufacture those products to stringent standards that help increase quality, lower costs and give you exceptional value for years to come.

## Providing Superior Value

Our commitment doesn't end with the sale. Our dedicated service teams provide support when you need it most. Our extensive parts network ships most parts within 24 hours. Simply put, we're always working to help maximize your "up time" so you can be more successful.

Genie is driven by one goal: doing the right thing, at the right time for our customers. That's not just what we do; it's who we are. So tell us what you need. We're listening.



Setting the Standard: Terex Aerial Work Platforms (AWP) manufactures some of the most advanced, highest-valued lift equipment in the industry. Distinctive blue Genie® lifts set the standard for performance and durability — not to mention support from people who understand your business.



## Convenience in a Cost-Effective Package

Genie® aerial work platforms are easy to use and cost effective, making them the first choice for a wide range of applications. One person can easily set them up and get to work within minutes, providing the ideal all-around tool for almost any access application. Their light weight and compact size make Genie aerial work platforms convenient to use in schools, churches, warehouses and more. Genie aerial work platforms also provide solutions for interior work on large construction sites, like high rises, as well as being perfect for light-duty construction purposes.

Genie aerial work platforms are designed to enhance productivity in the workplace. Flexible features on the AWP™, IWP™ and Runabout™ family models offer convenience at a low cost. Their lightweight construction makes them easy to manoeuvre, use and transport, delivering excellent uptime. Each model offers a variety of options and accessories to customize your machine. Genie aerial work platforms offer an economical solution for all your access needs.

The patented Genie mast system is the most rigid in the industry.



# Convenient, Versatile Access

Genie® AWP™ Super Series aerial work platforms are an industry favorite due to their ease of use, convenience and flexibility. Their lightweight manoeuvrability and durable design make them a versatile option for a wide variety of rental, light-duty construction and maintenance applications.



## Easy Transport

The unique rear mast pivot bar and lightweight design allow it to be easily loaded into a pickup truck. Outrigger storage and forklift pockets, tie-down attachment points and an overhead crane attachment point add transportation convenience.



The Genie AWP Super Series is the top-selling aerial work platform in the industry.



### Durable Mast and Platform

The patented Genie® mast system is the most rigid in the industry. Constructed of durable aircraft-quality aluminum, the mast provides user comfort and security at all working heights.



### Doorway Access and Manoeuvrability

All units roll through standard doorways for easy access, and models up to 9.1 m (30 ft) don't need to be tilted back. An exclusive six-point wheel and caster rocker base system also manoeuvres easily around corners and over thresholds or debris.

# A Base To Fit Your Needs

Choose from three bases (standard, narrow or rough terrain) and four different platform options for the exact lift that meets your access needs.

## Standard Base

Our most popular model, perfect for everyday applications.



## Narrow Base

Working in congested areas and narrow aisles.



## Rough Terrain Base

Ideal for use on unfinished surfaces.




## User-Friendly Controls

Controls include a low battery indicator, locking key switch and dual-activated up/down switch as well as outrigger setup confirmation lights. All AC and DC models are equipped with an auxiliary platform-lowering feature for descent in the event of a power failure.



The versatility of the AWP™ Super Series provides multiple worksite solutions.



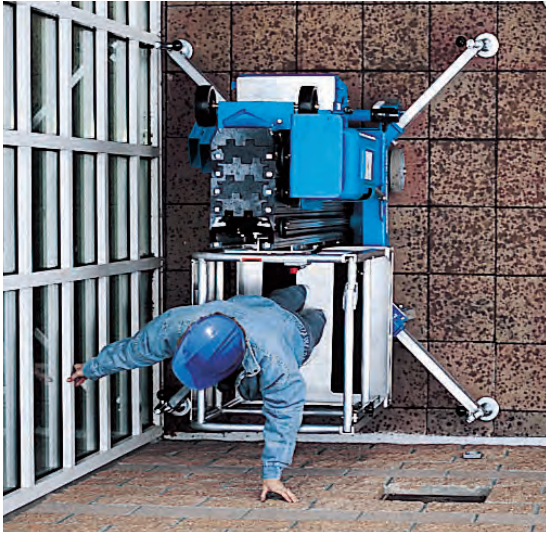

### Close Access

The compact X-pattern outrigger footprint is the smallest in the industry, allowing access as close as 8 cm (3 in) from walls. With proximity like that, you'll be within easy arm's reach of your job. Simple setup and 2 to 14 m (6 to 46 ft) of working height make the AWP Super Series the ideal choice for applications requiring close access.



### Tilt-Back

A tilt-back frame allows the AWP™-36S and AWP-40S models to roll through standard doorways.



## Aerial Work Platform Models Available

AWP-20S

AWP-25S

AWP-30S

AWP-36S

AWP-40S

# Stability and Reliability

Genie® IWP™ Super Series lifts can be easily moved around your worksite and set up in seconds. In addition, all AC and DC models are equipped with an auxiliary platform-lowering feature on both platform and ground controls, enabling descent in the event of a power failure. Reaching heights up to 11 m (35 ft 6 in), the easy-to-use IWP comes in two base models (standard and wide) with four different platform options to meet your specific application requirements.



## User-Friendly Platform and Controls

Control features include a low battery indicator, locking key switch, a dual-activated up/down switch and proper setup confirmation. Select units have a ground fault interrupter receptacle on the platform for convenient use of power tools.



*\* Shown with power wheel assist option*

Easy setup in seconds quickly gets you working at heights of up to 11 m (35 ft 6 in).





### Outreach Option

Provides over 61 cm (2 ft) of additional horizontal reach (IWP™-20S only). Ideal for maneuvering up and over shelves, machinery and equipment.



### Exceptional Stability

Rigid aluminum mast provides user comfort and security, and features heavy-duty lifting chains for strength and reliability. Units also feature built-in automatic level sensing. Two front integral levelling jacks provide an additional 5 cm (2 in) of adjustability.



### Doorway Access

The standard base model easily rolls through standard doorways. The IWP-30S wide base model rolls through typical industrial double doorways.

## Industrial Work Platform Models Available

IWP-20S

IWP-25S

IWP-30S

# Productive Solutions

The Genie® Runabout™ family products, including the Runabout™ (GR™), the Runabout™ Contractor (GRC™) and the Runabout™ with jib (GR™-J) are ideal for warehousing, transporting, general maintenance. The construction-ready Runabout™ Contractor and the jib version of our popular Genie® Runabout™ feature a tube-in-tube telescoping mast and steel platform for durability in rougher environments. The Runabout™ with jib range is perfect for locations where superior outreach in confined spaces is required.



## Easy Control and Service

Platform controls are equipped with on-board diagnostics. Proportional lift and drive controls provide a smooth ride. All major components are easy to access for convenient servicing.



## Reach Further

The GRC model features a standard extension deck which provides a large work space for up to two operators (44 cm, 17.5 in outreach).



Compact size and full elevation drive features deliver superior productivity.





### Compact Accessibility

Narrow 75 to 80 cm (2 ft 5.5 in to 2 ft 7.5 in) width and 1.35 m (4 ft 5 in) length allows the GR and GRC models to fit in most passenger lifts. Units can be driven through doorways with an operator on board and have 6 cm (2.5 in) of ground clearance in stowed position.



### Excellent Manoeuvrability

Features on the GR and the GRC include zero inside turning radius, 30% gradeability, a spring-applied hydraulically released brake system and 25 cm (10 in) non-marking solid rubber tyres.

## Genie® Runabout Family Models Available

GR-12 | GR-15 | GR-20 | GR-20J | GR-26J | GRC-12





## Genie® Runabout™ with Jib Offers More Versatility

The GR™-20J and the GR-26J respectively offer an “up-and-over” maximum clearance of 4.25 (13 ft 10.7 in) and 6.70 m (21 ft 10.5 in) and a maximum horizontal reach of 3.25 m (10 ft 7 in) and 3.15 m (10 ft 3 in). With an outstanding 140° jib range of motion and a narrow footprint the Genie Runabout with Jib offers precise positioning in restricted working areas.





### Quiet and Comfortable Drive Functions

The drive system's variable speed DC motor makes precise adjustments in tight areas. It also provides progressive braking as soon as the joystick is released, making the unit extremely responsive. With dual rear wheel drive and a tight 0.59 m (1 ft 11 in) inside turning radius, the GR-J models easily manoeuvre around restrictive work environments to fit through congested industrial areas, corridors and hallways. Standard non-marking tyres allow use on sensitive flooring.

### Get More Done in a Small Amount of Space

Both models allow two-person occupancy indoors to get more done in a small amount of space. The 0.90 m x 0.75 m (2 ft 11 in x 2 ft 5.5 in) compact steel work platform features a low entry height of 15 cm (6 in).

## Genie® Runabout Family Models Available

**GR-12** | **GR-15** | **GR-20** | **GR-20J** | **GR-26J** | **GRC-12**



# Streamlining Inventory Management

The Genie® QuickStock™ lift is designed to make your inventory picking faster, easier and safer than rolling stairs or manually propelled lifts. It is available in three Runabout™ model heights (3.48 m/11 ft 5 in, 4.47 m/14 ft 8 in, and 6.07m/19 ft 11 in) and comes in two different versions: Retail (R) or Warehouse (W). All the units are also driveable when fully elevated for increased productivity.



## QuickStock Retail Version

The Genie QuickStock lift Retail version offers standard features customized for front of the house applications. Dual flashing beacons notify surrounding people that the unit is in operation. Additionally, an obstruction sensing pad located on top of the chassis senses when an object is on the unit, causing the platform to automatically stop descending.



## QuickStock Warehouse Version

The Genie QuickStock lift Warehouse version includes the same features and benefits of the retail package, with the exception of the dual flashing beacons and the obstruction sensing pad.



## Easy to Maintain

Enclosed wiring, maintenance-free batteries and an industrially-proven design provide low machine maintenance. Light machine weight, non-marking tyres, and quick battery charging allows for quick use of the QuickStock lift on most surfaces and applications.

## Quickstock Models Available

[QS-12](#)

[QS-15](#)

[QS-20](#)



# A Platform for Every Job

Choose from a variety of sizes, shapes and materials to create just the right lift solution for your specific application needs.

## AWP™, IWP™ and Runabout™ Platform Options



### Standard Platform With Sliding Midrail

69 x 66 cm (27 x 26 in)  
An excellent general-purpose platform.



### Gated Standard Platform

69 x 66 cm (27 x 26 in)  
Provides "step in" entry.



### Gated Narrow Platform

66 x 51 cm (26 x 20 in)  
For access through standard ceiling tile.



### Gated Ultra Narrow Platform

56 x 46 x 114 cm (22 x 18 x 44.75 in). For access through other small openings.



### Standard Fiberglass Platform\*

74 x 67 cm (29 x 26.5 in)  
A general-purpose fiberglass platform designed for containing tools and materials.

## Exclusive Quickstock™ Platform



### Stock Picker™ Platform

89 x 73 cm (35 x 28.5 in)  
Offers dual side entry gates and front-folding tray.



### Sliding Mid Rail Extension Deck Platform

140 x 75 cm (55 x 29.5 in)  
Provides 51 cm (20 in) of horizontal outreach and a larger work area within the platform.



The narrow platform option is perfect for accessing the space above ceiling tiles.

\* Fiberglass platforms do not provide protection from electric shock.

# Options for Aerial Work Platforms



## Super-Straddle™

The Super-Straddle model allows you to use your Genie® aerial work platform in areas you never thought possible. The Super-Straddle provides up to 1.22 m (4 ft) of vertical clearance over fixed obstacles. Easily access light bulbs, ceiling panels or other maintenance tasks above permanent seating, stairwells and other obstructions. End frames adjust so the Super-Straddle can be used on slopes of up to 6 degrees — perfect for auditoriums and theaters.



## Power Wheel assist

A power wheel assist on DC models activates hydraulic forward and reverse drive for faster, easier maneuverability. This option makes navigation of the IWP™ Super Series lifts simple and effortless.

	AWP™-20S	AWP-25S	AWP-30S	AWP-36S	AWP-40S	IWP-20S	IWP-25S	IWP-30S
Base Options								
STANDARD BASE	S	S	S	S	S	S	S	
ROUGH TERRAIN BASE	0	0	0					
WIDE BASE (ANSI/CE/AUS ONLY)								S
NARROW BASE	0	0	0	0	0			
Power Options								
AC	0	0	0	0	0	0	0	0
DC	0	0	0	0	0	0	0	0
DUAL BATTERY PACKAGE						0	0	0
AIR MOTOR			0					
Other Options								
TILT-BACK				S	S			
OUTREACH PACKAGE						0		
POWER WHEEL ASSIST						0	0	0
Accessories								
NARROW BASE CONVERSION KIT* (AVAILABLE FOR RT BASE ONLY)	0	0	0					
RT BASE CONVERSION KIT (AVAILABLE FOR NARROW BASE ONLY)	0	0	0					
SUPER STRADDLE™	0	0	0	0	0			
TOOL TRAY	0	0	0	0	0	0	0	0
PLATFORM-LOCATING LASER LIGHT	0	0	0	0	0	0	0	0
FLUORESCENT TUBE CADDY	0	0	0	0	0	0	0	0
OPERATIONAL WARNING LIGHT AND DESCENT ALARM PACKAGE	0	0	0	0	0	0	0	0

\* Available aftermarket only

0 = Option    S = Standard



Operational Warning Light



Fluorescent Tube Caddy  
(only available on narrow  
or standard platform)



Work Station Tray  
(not available on narrow  
or ultra-narrow platforms)



# Options for Genie® Runabout™ and Quickstock™ Models

	GR™-12	GR-15	GR-20	GR-20J	GR-26J	GRC™-12	QS™-12R	QS-15R	QS-20R	QS-12W	QS-15W	QS-20W
Platform												
STOCK PICKER™ PLATFORM							S	S	S	S	S	S
DUAL BIKE HOOKS							0	0	0	0	0	0
FLUORESCENT TUBE CADDY	0	0	0			0						
AC POWER TO PLATFORM				0	0							
AIRLINE TO PLATFORM				0	0							
PLATFORM WORK LIGHTS				0	0							
Warning												
MOTION ALARM	0	0	0			0	0	0	0	0	0	0
DUAL FLASHING BEACON	0	0	0			0	S	S	S			
FLASHING BEACON				0	0							
AUTOMOTIVE-STYLE HORN	0	0	0			0						
OBSTRUCTION SENSING PAD							S	S	S			
Power												
MAINTENANCE-FREE BATTERY	0	0	0			0	S	S	S	S	S	S

0 = Option S = Standard



Runabout Workstation Tray



Runabout Contractor Workstation Tray



QuickStock Dual Bike Hooks


A convenient way to lift bicycles up to or down from high displays or warehouse shelving — no need for the operator to lift, maneuver or hold the bicycle in the platform. Will hold up to 20 kg (45 lbs).

# Specifications

# Aerial Work Platforms

MODEL	WORKING HEIGHT		WIDTH		PLATFORM HEIGHT		LIFT CAPACITY	
	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL	METRIC	IMPERIAL
Aerial Work Platforms								
AWP™-20S	8.12 m	26 ft 1 in	74 cm	2 ft 5 in	6.12 m	20 ft 1 in	159 kg	350 lbs
AWP-25S	9.57 m	30 ft 10 in	74 cm	2 ft 5 in	7.57 m	24 ft 10 in	159 kg	350 lbs
AWP-30S	11.00 m	35 ft 6 in	74 cm	2 ft 5 in	9.00 m	29 ft 6 in	159 kg	350 lbs
AWP-36S	13.10 m	42 ft 5 in	74 cm	2 ft 5 in	11.10 m	36 ft 5 in	159 kg	350 lbs
AWP-40S	14.29 m	46 ft 4 in	74 cm	2 ft 5 in	12.29 m	40 ft 4 in	136 kg	300 lbs
Industrial Work Platforms								
IWP™-20S	8.24 m	26 ft 6 in	81 cm	2 ft 8 in	6.24 m	20 ft 6 in	159 kg	350 lbs
IWP-25S	9.44 m	30 ft 5 in	81 cm	2 ft 8 in	7.44 m	24 ft 5 in	159 kg	350 lbs
IWP-30S	11.00 m	35 ft 6 in	1.02 m*	3 ft 4 in*	9.00 m	29 ft 6 in	159 kg	350 lbs
Self-Propelled Aerial Work Platforms (Genie® Runabout™ Family And Quickstock™)								
GR™-12	5.45 m	17 ft 4 in	75 cm	2 ft 5.5 in	3.45 m	11 ft 4 in	227 kg	500 lbs
GR-15	6.47 m	20 ft 8 in	75 cm	2 ft 5.5 in	4.47 m	14 ft 8 in	227 kg	500 lbs
GR-20	8.02 m	25 ft 9 in	80 cm	2 ft 7.5 in	6.02 m	19 ft 9 in	159 kg	350 lbs
GR-20J	7.70 m	25 ft 3 in	99 cm	3 ft 3 in	5.70 m	18 ft 8 in	200 kg	440 lbs
GR-26J	9.90 m	32 ft 6 in	99 cm	3 ft 3 in	7.90 m	25 ft 11 in	200 kg	440 lbs
GRC™-12	5.66 m	18 ft	80 cm	2 ft 7.5 in	3.66 m	12 ft	227 kg	500 lbs
QS™-12	5.45 m	17 ft 5 in	75 cm	2 ft 5.5 in	3.48 m	11 ft 5 in	227 kg	500 lbs
QS-15	6.47 m	20 ft 8 in	75 cm	2 ft 5.5 in	4.47 m	14 ft 8 in	227 kg	500 lbs
QS-20	8.02 m	25 ft 9 in	80 cm	2 ft 7.5 in	6.02 m	19 ft 9 in	159 kg	350 lbs

\*Wide Base

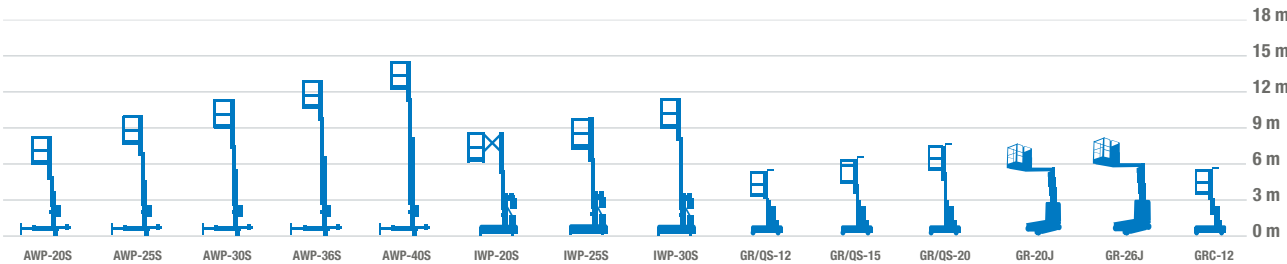



### Corporate Headquarters: United States

18340 NE 76th Street, P.O. Box 97030, Redmond, Washington 98073-9730

Telephone **+1 (425) 881-1800** · Fax +1 (425) 883-3475

[www.genielift.com](http://www.genielift.com)

### Europe, Middle East, Africa and Russia

To view all our locations visit [www.genielift.co.uk/locations](http://www.genielift.co.uk/locations)

Telephone **(+44) 800 988 3739** (Toll Free for UK/Ireland) · Fax +31 165 511 148 · Email:AWP-InfoEurope@terex.com

[www.genielift.co.uk](http://www.genielift.co.uk)

### Worldwide Manufacturing And Distribution

Australia · Brazil · Caribbean · Central America · China · France · Germany · Italy · Japan · Korea · Mexico

Russia · Southeast Asia · Spain · Sweden · United Arab Emirates · United Kingdom · United States

Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade names of Terex Corporation and/or their subsidiaries in the USA and many other countries. Genie and Taking You Higher are trademarks of Terex Corporation or its subsidiaries.

© 2015 Terex Aerial Work Platforms. 07/15 Part No. 109304UK.

