

Specifications

Working Height:	200 kgs. (2-Men) to 24 metres
Min. Jacked Width (to outside of Jack-feet):	3.4 m
Max. Jacked Width (to outside of Jack-feet):	5.1 m
Horizontal Work Reach*:	(approx) 11.5 m
Gross Vehicle Weight:	2950 kgs
Max. Weight on any one Outrigger†:	1800 kgs
Loadings on Front Wheel:	900 kgs
Loadings on Front Axle:	900 kgs
Loadings on each Rear Wheel:	1100 kgs
Loadings on Rear Axle:	2200 kgs

* Note Outreach varies according to Jack-spread & Cage Loading.
† When Cage & Boom are fully extended exactly over that Outrigger with maximum safe working load.

Dimensional data

Cage Size (2-Man):	0.71 m x 1.2 m
Stowed Width without Cage:	0.80 m
Stowed Height:	1.98 m
Stowed Length:	6.20 m
Wheelbase:	2.30 m

E & OE Constant Engineering progress makes it necessary that we reserve the right to vary specifications, equipment and pricing policy without notice.


Tyres: Heavy-duty Pneumatic
Power: Battery/ Mains 240v.

Spider TS24 Battery/Mains Power

- 24 m. (78' 0") maximum Working Height
- 11.5 m. (37' 4") maximum Outreach
- 0.80 m. (2' 7") minimum Machine-width
- 11' 2" (3.4 m.) minimum Jacked-width to outside of Jack-feet

- The Spider TS24 is able to pass through a standard doorway of 0.815m (2' 9") wide x 1.98m (6' 6") high
- Numerous Stabiliser-leg configurations allow best use of irregular or restricted floor space.
- Stabiliser-legs can be set up on uneven ground – even on steps.
- Rubber-based Jack-feet Pads offer protection to flooring.
- Self-propelled by pedestrian control. 2-speed/inching.
- Battery/Mains power – (240volt).
- Fully Certificated and recognised Training on the safe operation of these machines is available through Facelift.

Please telephone The Training Manager on :-
01268 282200 for further information.

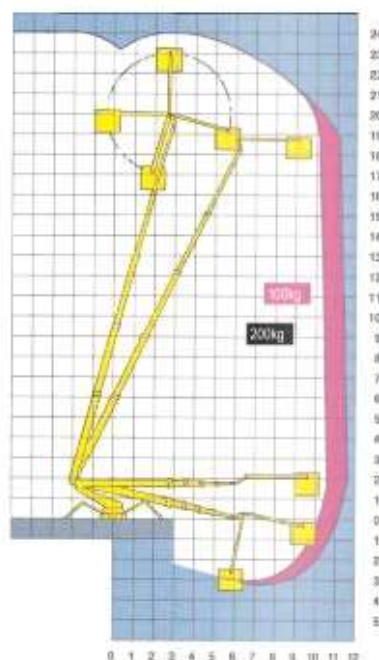

Head Office
Westside, London Road,
Hickstead, West Sussex,
RH17 5LZ

T 01444 88 11 88
F 01444 88 11 99
E hiredesk@facelift.co.uk
W facelift.co.uk

facelift
access and safety made easy

[BACK TO NAVIGATION PAGE](#)